

CERBERUS Windows wallet masternode guide

1. Send exactly 1000 CBS to your address
2. Wait till transaction gets atleast 15 confirmations
3. When ready go TOOLS -> OPEN WALLET CONFIGURATION FILE
4. You will get an empty file in which you should copy-paste the below code:


masternode=1

masternodeprivkey=

externalip=

keep it open

5. Go TOOLS -> DEBUG CONSOLE ->type „MASTERNODE GENKEY”

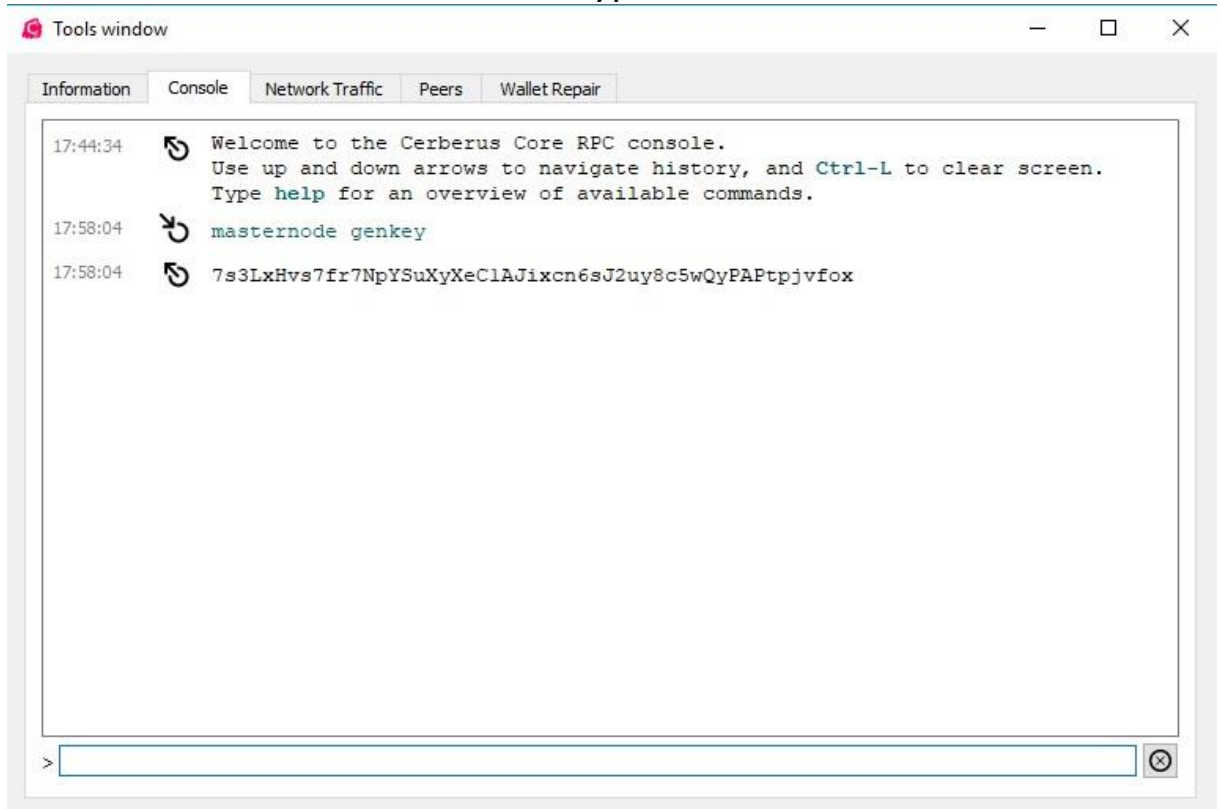

Copy-paste the genkey next to the „masternodeprivkey=”


6. Now you need to get your external IP (IPv4) and paste it next to „externalip=”

You can get your IP at <http://whatismyip.host/>

You should have your 10666 port open.

If it is not open please do it accordingly to your router's model

7. At this point your configuration file should look similar to this:

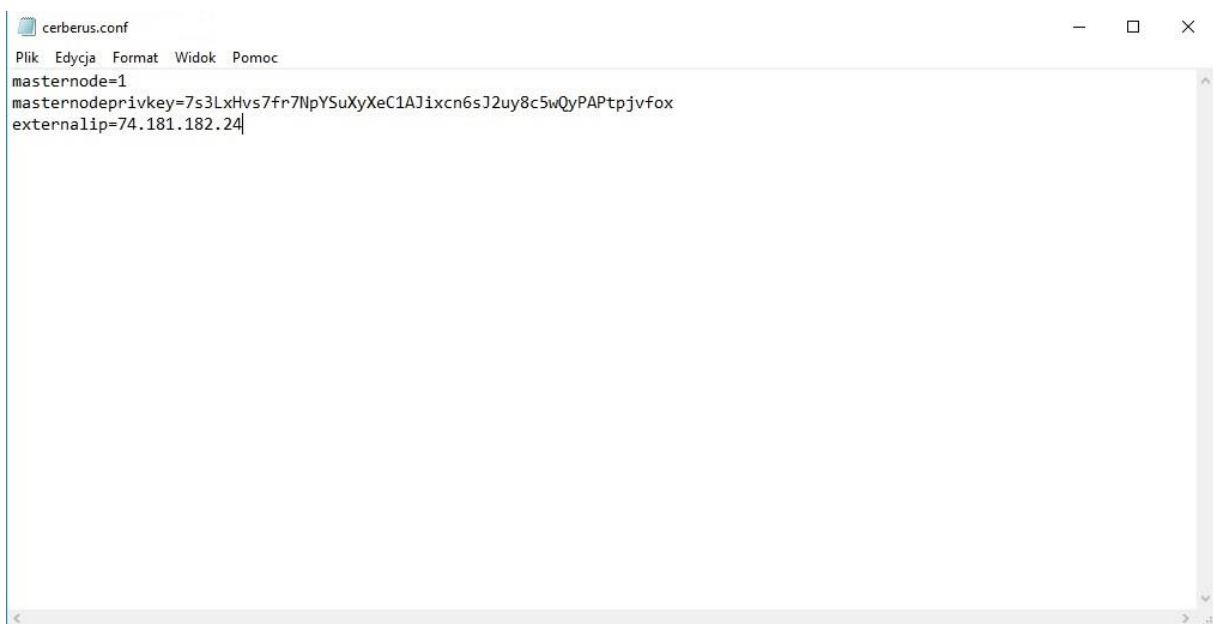

```
cerberus.conf
Plik: Edycja Format Widok Pomoc
masternode=1
masternodeprivkey=7s3LxHvs7Fr7NpYSuXyXeC1AJixcn6sJ2uy8c5wQyPAPtpjvfox
externalip=74.181.182.24
```

8. Save the cerberus.conf file, close the wallet and open it again after few seconds.
9. Go again to the „debug console” and type

Masternode start

Masternode successfully started

Voila, Bon appetit